

# Magnetic Buzzer

## SV4/12-SN


DATE:2008.12.28

### 1 . Electrical Characteristics

VER.: 2


Resonant Frequency (Hz)	2300 ± 400
Operating Voltage (Vdc)	9.0 ~ 15
Rated Voltage (Vdc)	12
Current Consumption (mA/max)	50 at Rated Voltage
Sound Pressure Level (dB/min)	85 at 10cm at Rated Voltage
Tone/Pulse Rate	Constant
Operating Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-30 ~ +80
Condition by wave (°C)	260±5°C / within 5sec
Condition by hand (°C)	350±20°C / within 5sec

### 2 . Voltage/ Current / Sound Pressure

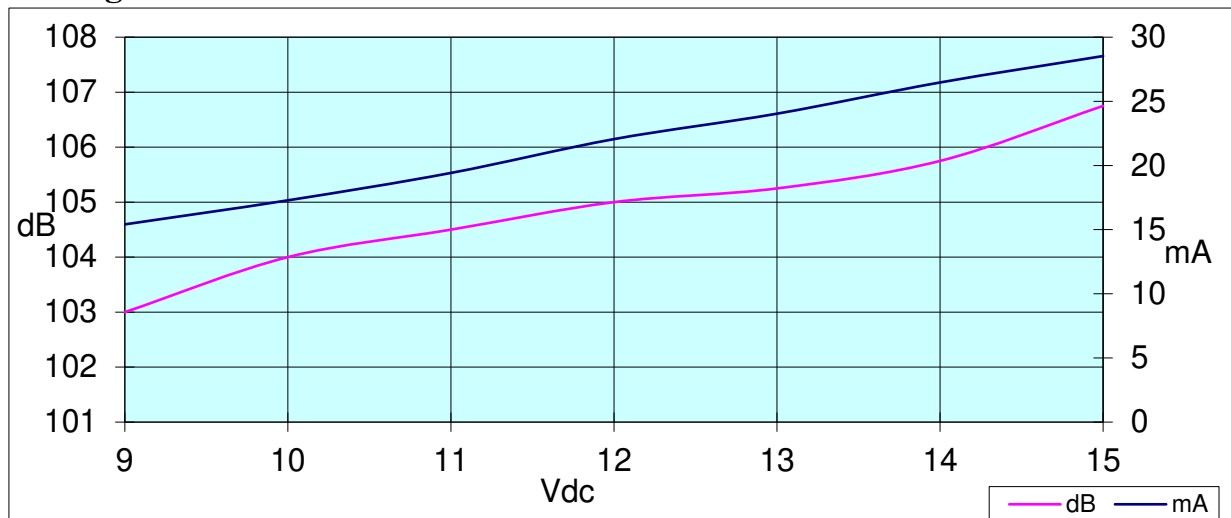

### 3 . Dimensions and Material

#### 3-1 Shape

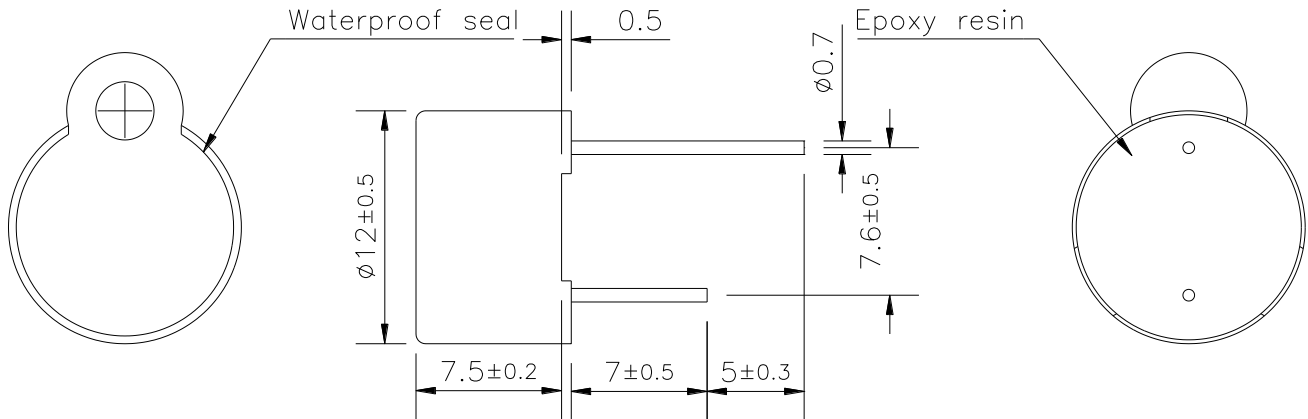

Unit : mm

#### 3-2 Material

Housing	PPO plastic resin (Color : Black)
Leading Pin	Tin Plated Brass
Weight (Gram)	1.6


### 4. TESTING METHOD

#### · *Standard Measurement conditions*

Temperature:  $25 \pm 2$  °C    Humidity: 45-60%

## · **Acoustic Characteristics**

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below.

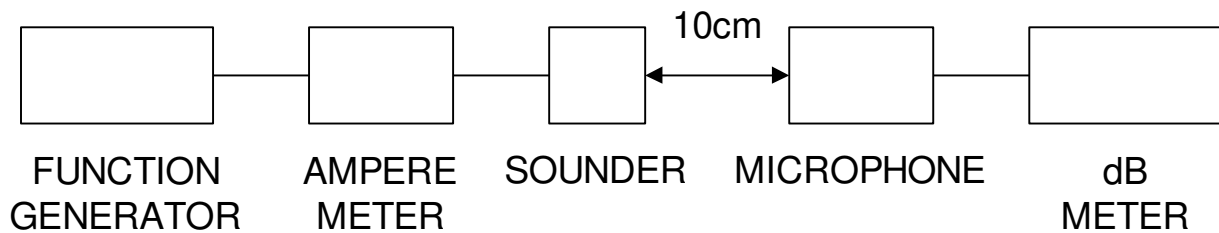

## 5. RELIABILITY

<b>ITEMS</b>	<b>METHOD OF TEST AND MEASUREMENTS</b>	<b>PERFORMANCE</b>
<i>Coldness withstanding</i>	<i>After 98 hours of being exposed to -30 °C environment, should be returned to normal environment for 2 hours, then re-proceed to test.</i>	<i>No abnormality shall exist</i>
<i>Hotness withstanding</i>	<i>After 98 hours of being exposed to +80 °C environment, should be returned to normal environment for 2 hours, then re-proceed to test.</i>	<i>No abnormality shall exist</i>
<i>Humidity withstanding</i>	<i>After 98 hours of being exposed to 40 °C 95%RH environment in actual operation, should be returned to normal environment for 2 hours, then re-proceed to test.</i>	<i>No abnormality shall exist</i>
<i>Durability</i>	<i>Testing after 1,000 hours actual continuous operation. (at standard measurement conditions)</i>	<i>No abnormality shall exist</i>
<i>Drop withstanding</i>	<i>A natural drop from 75cm high down to the ground.</i>	<i>No abnormality shall exist</i>
<i>Vibration withstanding</i>	<i>Vibration of 2,000 cycles per minute, 2mm amplitude, applied in X, Y and Z directions for 30 minutes each.</i>	<i>No abnormality shall exist</i>

## 6. PACKAGE METHOD

<1> 100pcs per box , Total 40 boxes per carton , total 4000pcs carton;

Volume: L\*W\*H=520\*335\*290mm

< 2>N . W . : 6.4KGS ; G . W . : 7.6KGS ;

< 3 > RoHS Mark: